
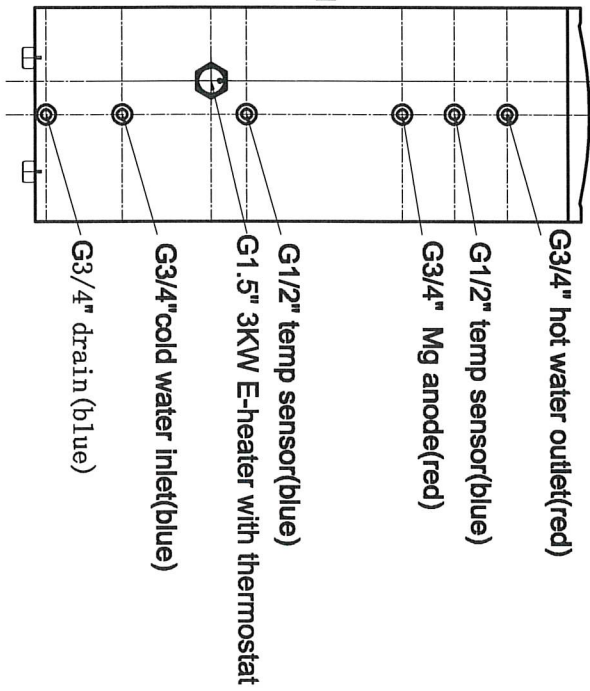


CAWT-300L

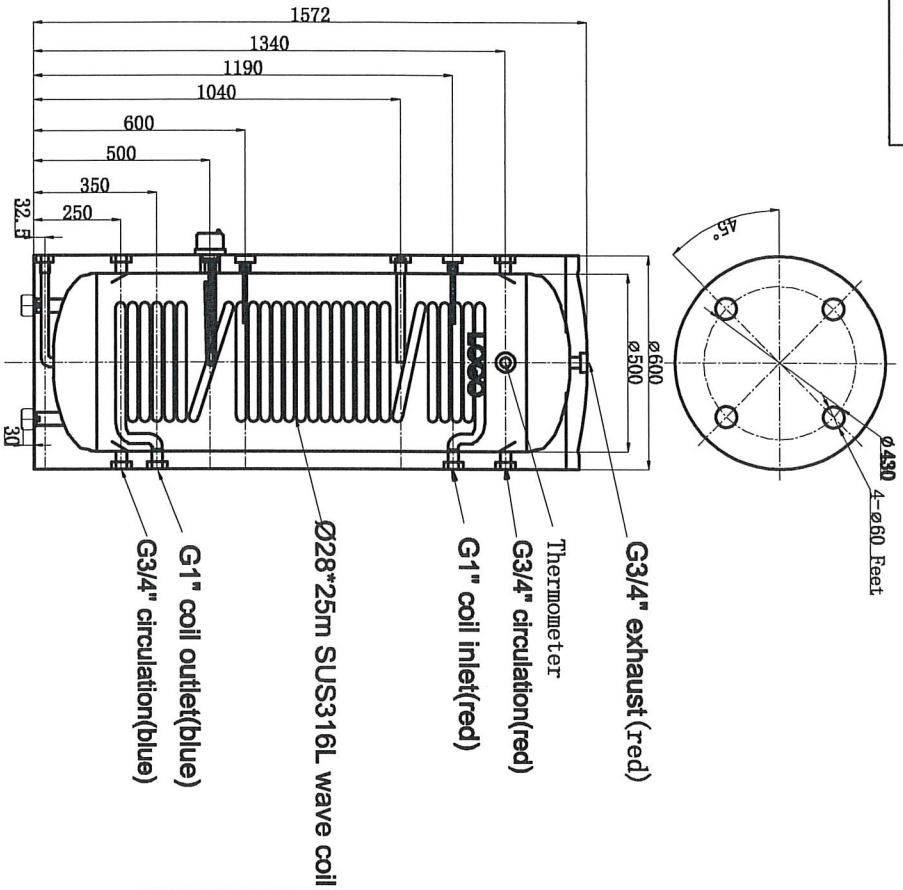

- Technical parameter:**
1. The water tank diameter is  $\Phi 600$ mm, outer shell is galvanized sheet with dark grey painting, 6-9.5mm, black top cover;
  2. Inner tank diameter is  $\Phi 500$ mm, duplex steel 2205, 6-8.0mm;
  3. With SUS316L wave coil  $\Phi 28 \times 25$ m, surface area is 3.3 m<sup>2</sup>;
  4. All the connectors are female.
  5. The insulation is 50mm polyurethane.

BEUER RES  
 SUPP RT  
 Westfields 1210  
 5688 HA Ormscot  
 Postbus 100  
 5688 ZJ Ormscot  
 Tel: +31 (0)93 122 07 00

3/15/13

图号	更改文件号	签字日期	材料	比例
设计			CAWT-300L	1:1
校核				
工艺				
审核				
日期				
材料 规格 6-8.0mm				20230618
SST HEATING ENGINEER CO., LTD.				