

4. NOISE LEVEL

(1) Sound power level


Model SRK20ZS-W, -WB, -WT

(Indoor unit)

Model	SRK20ZS-W, WB, WT	
Noise Level	Cooling	48 dB(A)
	Heating	50 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------


MODE	Rated capacity value
------	----------------------

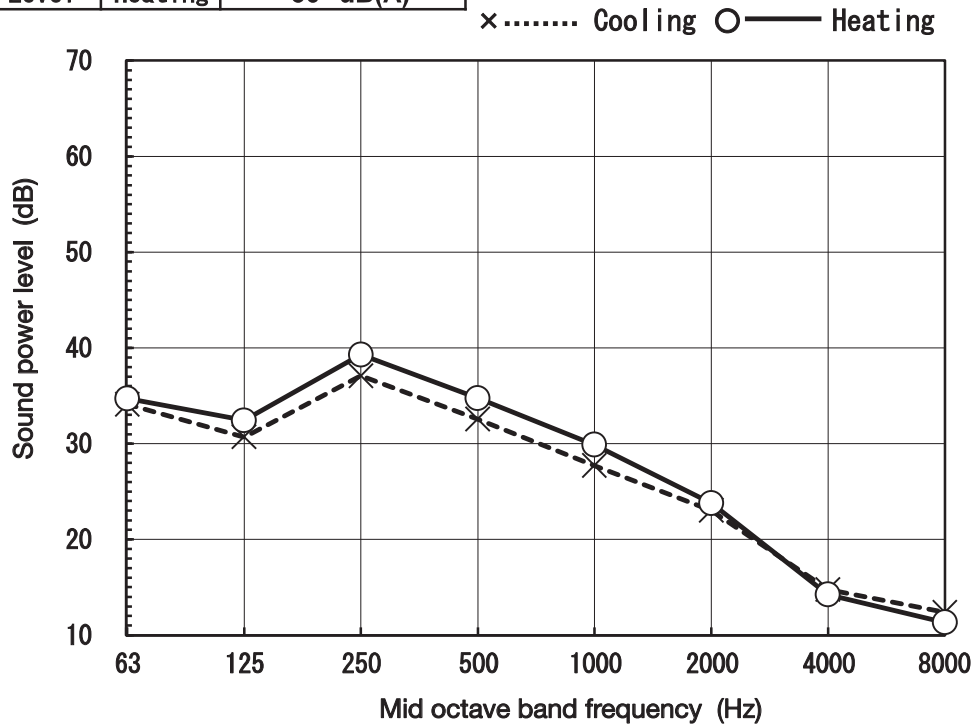

(Outdoor unit)

Model	SRC20ZS-W	
Noise Level	Cooling	56 dB(A)
	Heating	56 dB(A)

x..... Cooling ○—— Heating

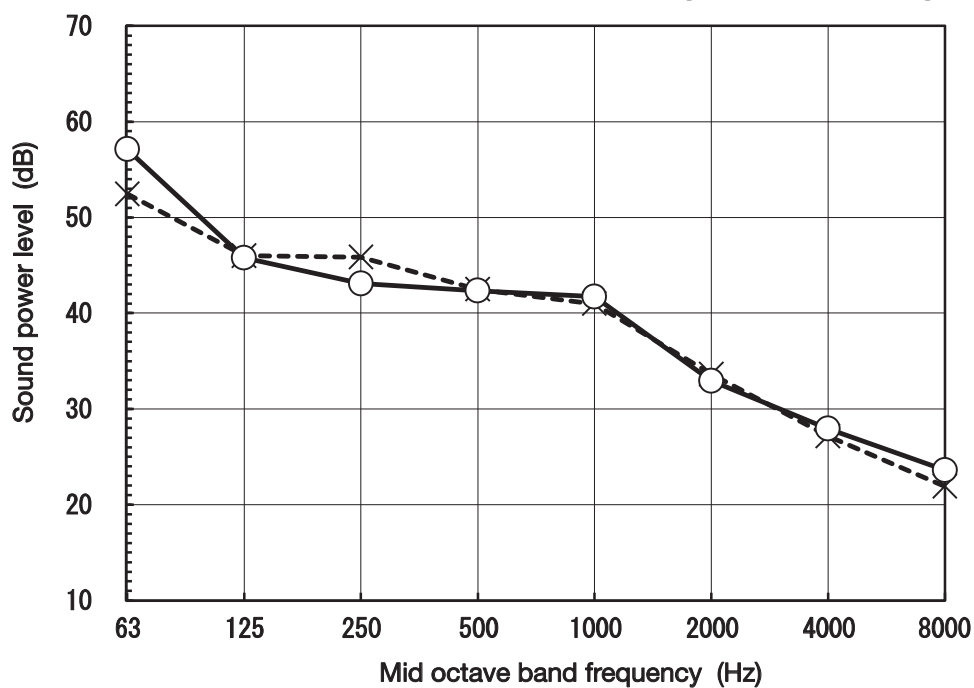


Model SRK25ZS-W, -WB, -WT

(Indoor unit)

Model	SRK25ZS-W, WB, WT	
Noise Level	Cooling	50 dB(A)
	Heating	53 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------


MODE	Rated capacity value
------	----------------------

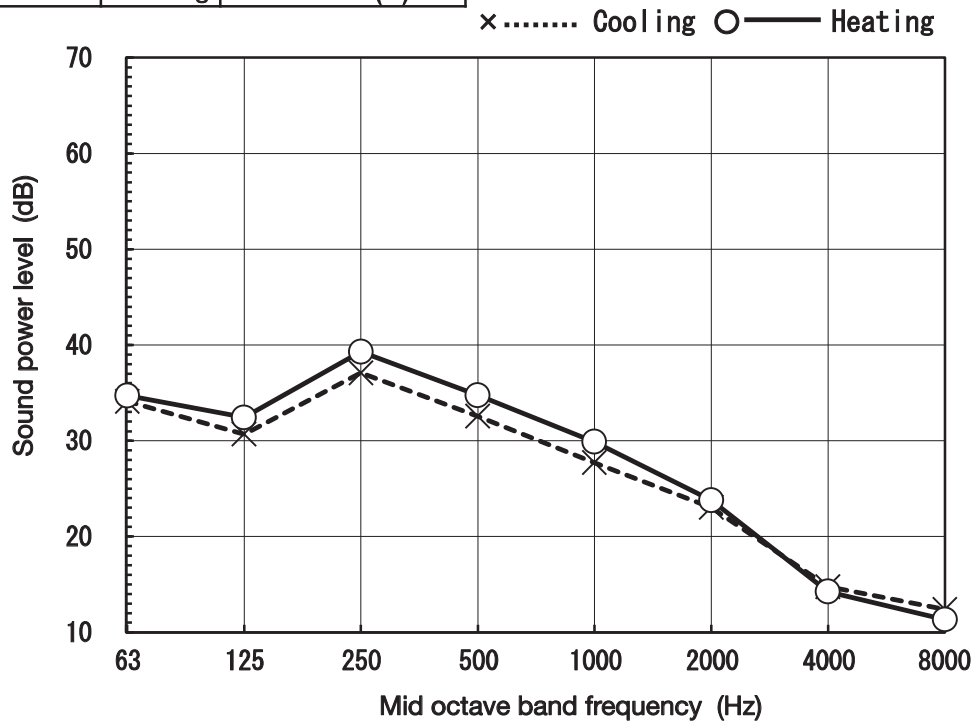

(Outdoor unit)

Model	SRC25ZS-W	
Noise Level	Cooling	56 dB(A)
	Heating	58 dB(A)

x..... Cooling ○—— Heating

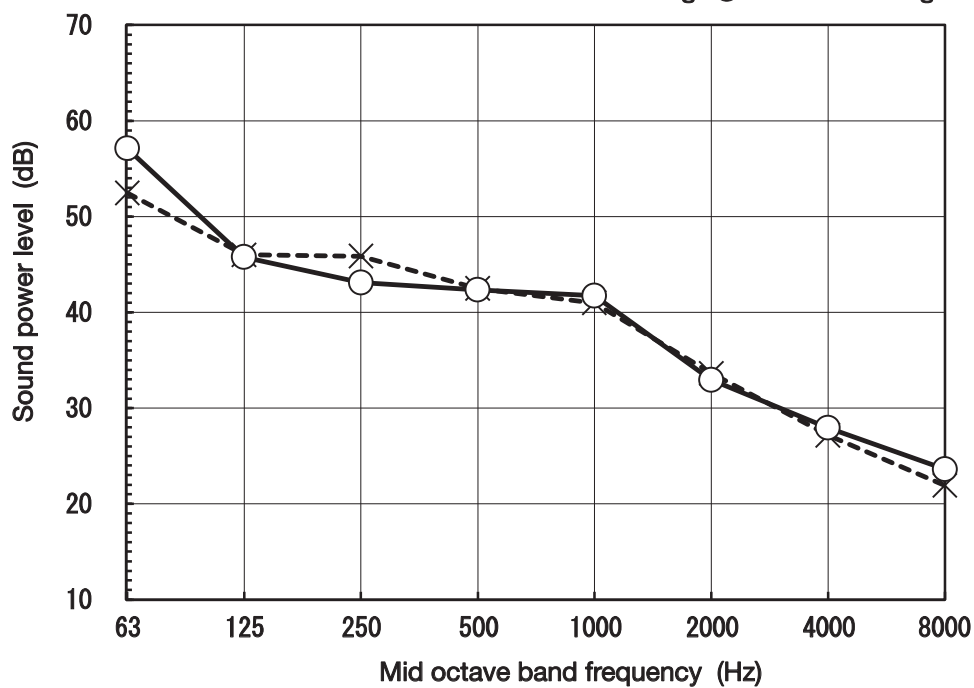


Model SRK35ZS-W, -WB, -WT

(Indoor unit)

Model	SRK35ZS-W, WB, WT	
Noise Level	Cooling	54 dB(A)
	Heating	56 dB(A)


Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value
------	----------------------

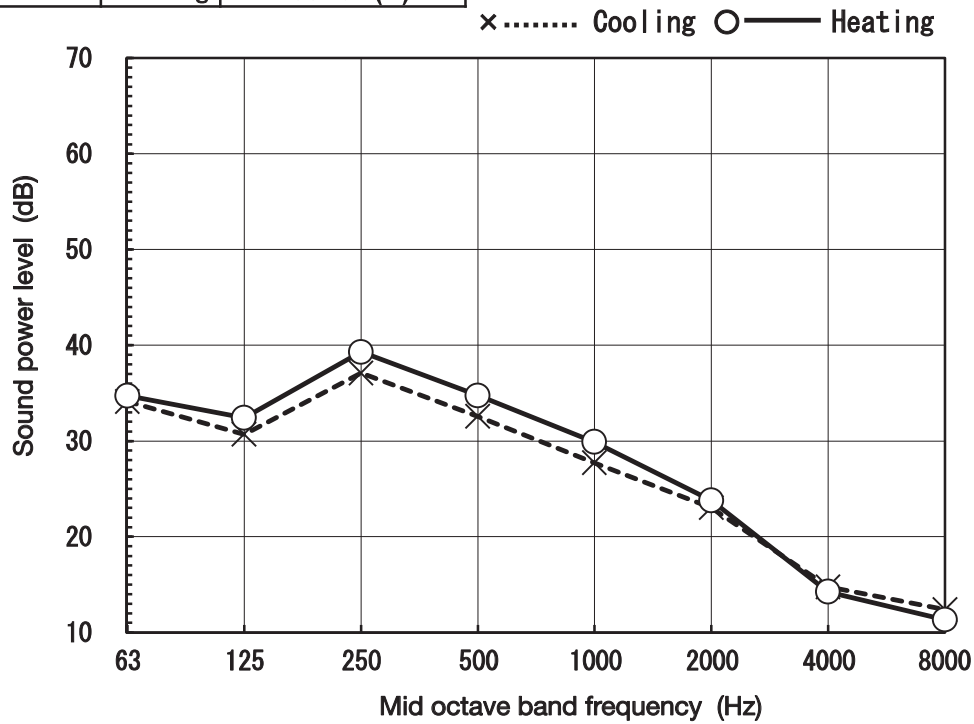

(Outdoor unit)

Model	SRC35ZS-W	
Noise Level	Cooling	61 dB(A)
	Heating	61 dB(A)

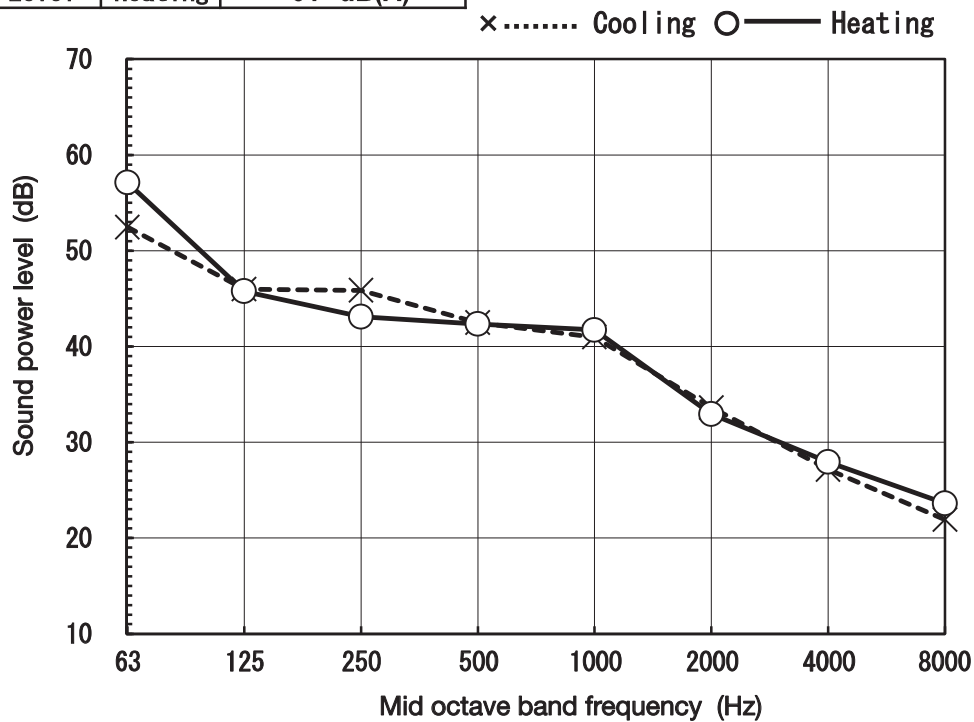


Model SRK50ZS-W, -WB, -WT

(Indoor unit)

Model	SRK50ZS-W, WB, WT	
Noise Level	Cooling	59 dB(A)
	Heating	60 dB(A)

Condition	ISO5151 T1/H1
-----------	---------------


MODE	Rated capacity value
------	----------------------

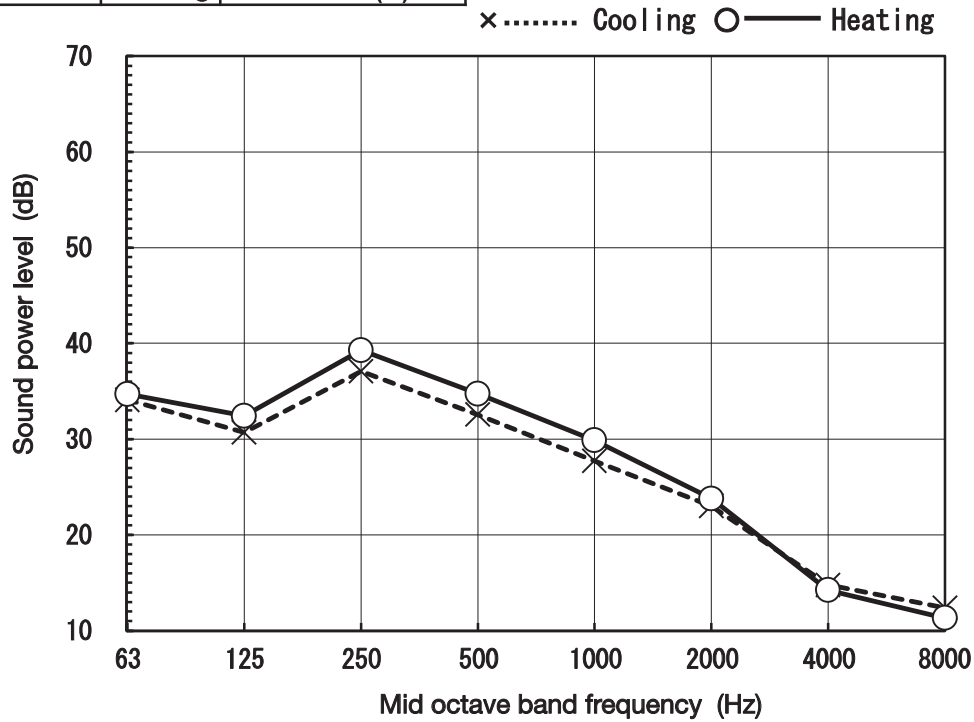

(Outdoor unit)

Model	SRC50ZS-W	
Noise Level	Cooling	61 dB(A)
	Heating	63 dB(A)

x..... Cooling ○—— Heating

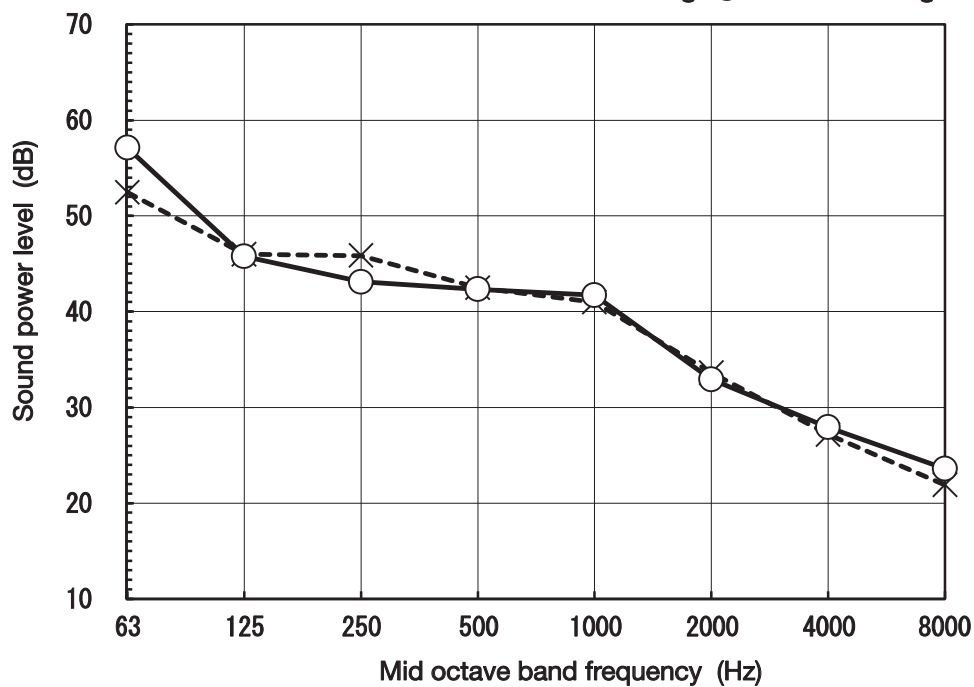

(2) Sound pressure level

(a) Rated capacity value


Model SRK20ZS-W, -WB, -WT

Condition	ISO5151 T1/H1
MODE	Rated capacity value

(Indoor unit)

Model	SRK20ZS-W, WB, WT	
Noise Level	Cooling	34 dB(A)
	Heating	36 dB(A)


●Mike position

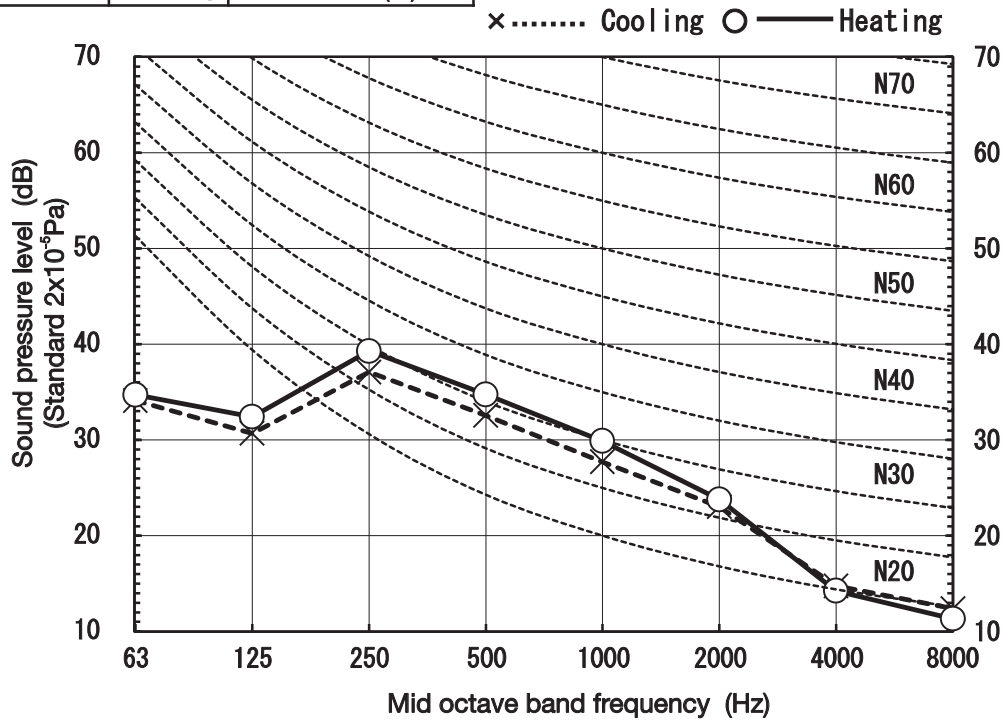

(Outdoor unit)

Model	SRC20ZS-W	
Noise Level	Cooling	45 dB(A)
	Heating	45 dB(A)

●Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

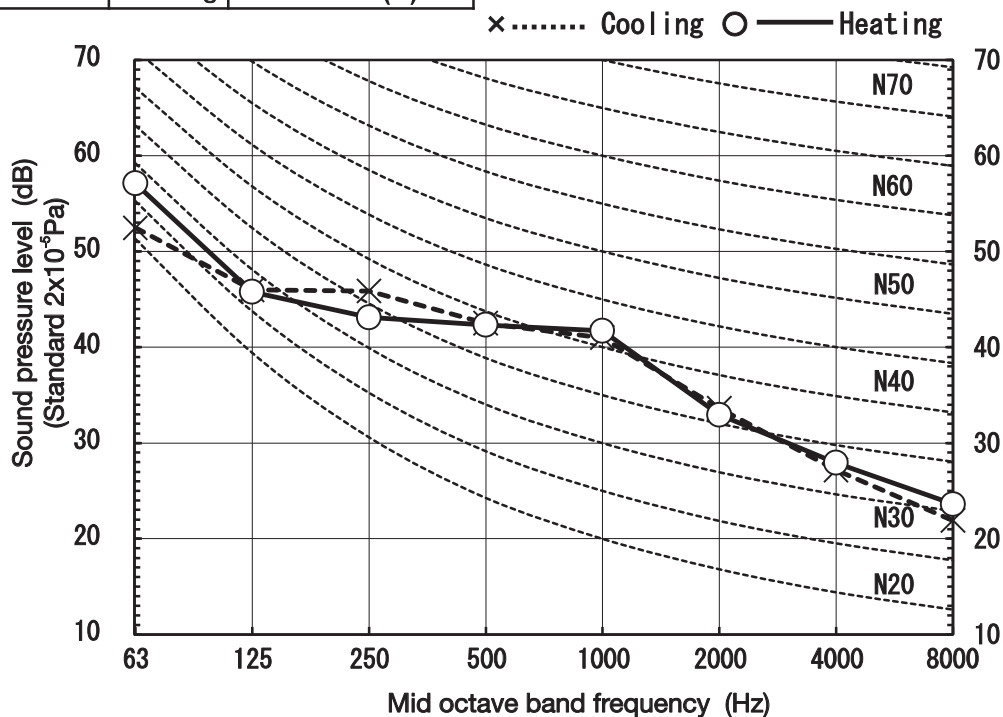

Model SRK25ZS-W, -WB, -WT


Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value
------	----------------------

(Indoor unit)

Model	SRK25ZS-W, WB, WT	
Noise Level	Cooling	36 dB(A)
	Heating	39 dB(A)


● Mike position

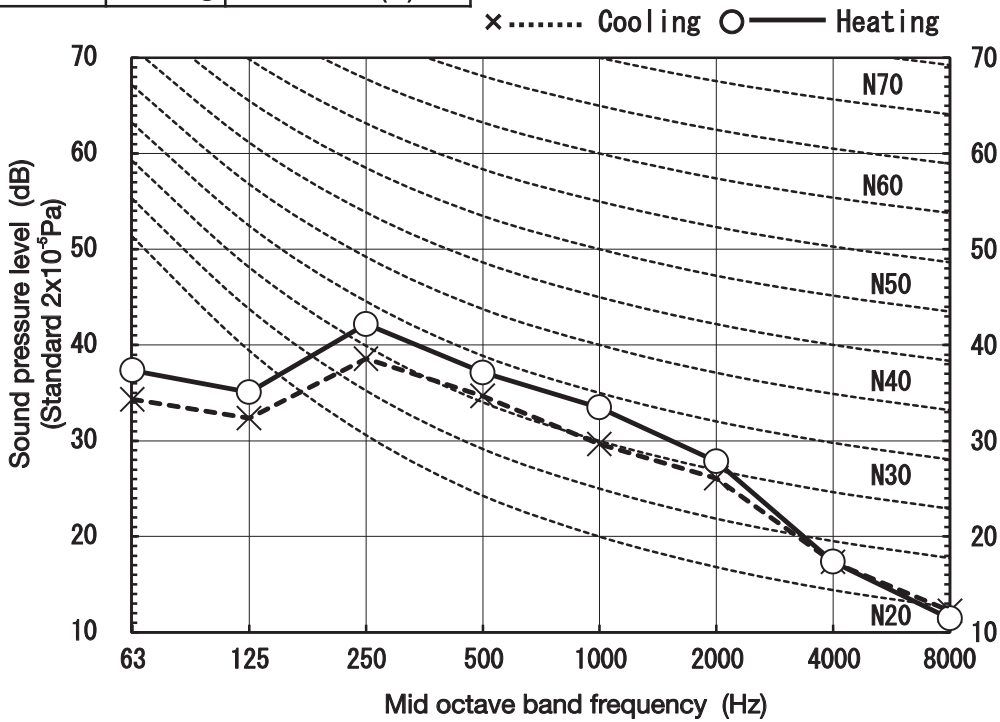

(Outdoor unit)

Model	SRC25ZS-W	
Noise Level	Cooling	46 dB(A)
	Heating	46 dB(A)

● Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

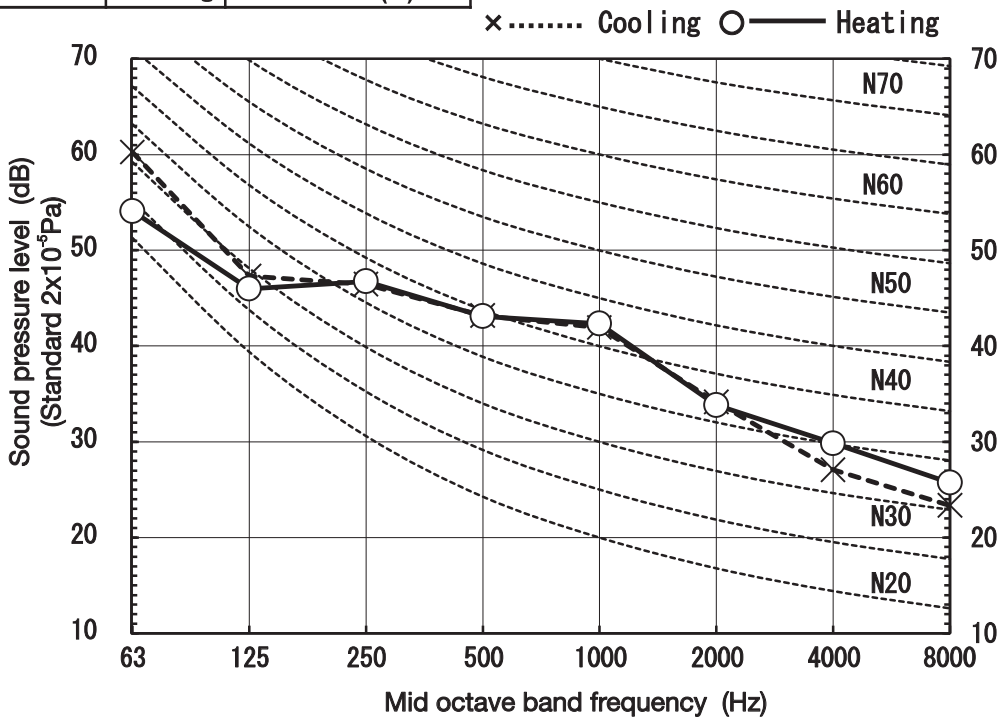

Model SRK35ZS-W, -WB, -WT


Condition	ISO5151 T1/H1
-----------	---------------

MODE	Rated capacity value
------	----------------------

(Indoor unit)

Model	SRK35ZS-W,WB,WT	
Noise Level	Cooling	40 dB(A)
	Heating	41 dB(A)


●Mike position

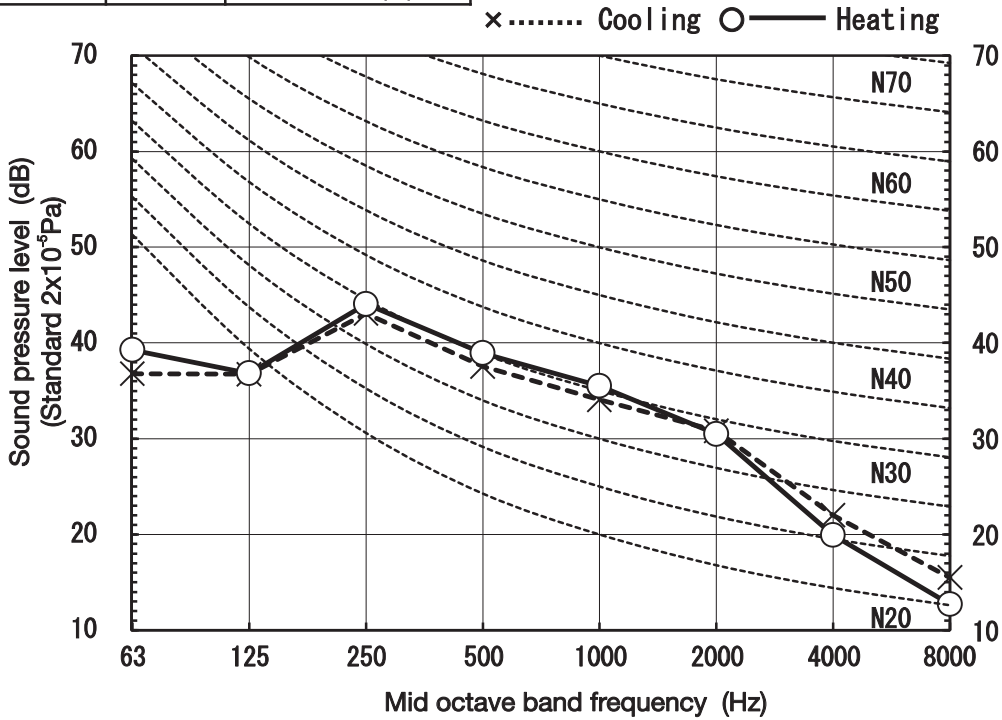

(Outdoor unit)

Model	SRC35ZS-W	
Noise Level	Cooling	50 dB(A)
	Heating	48 dB(A)

●Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

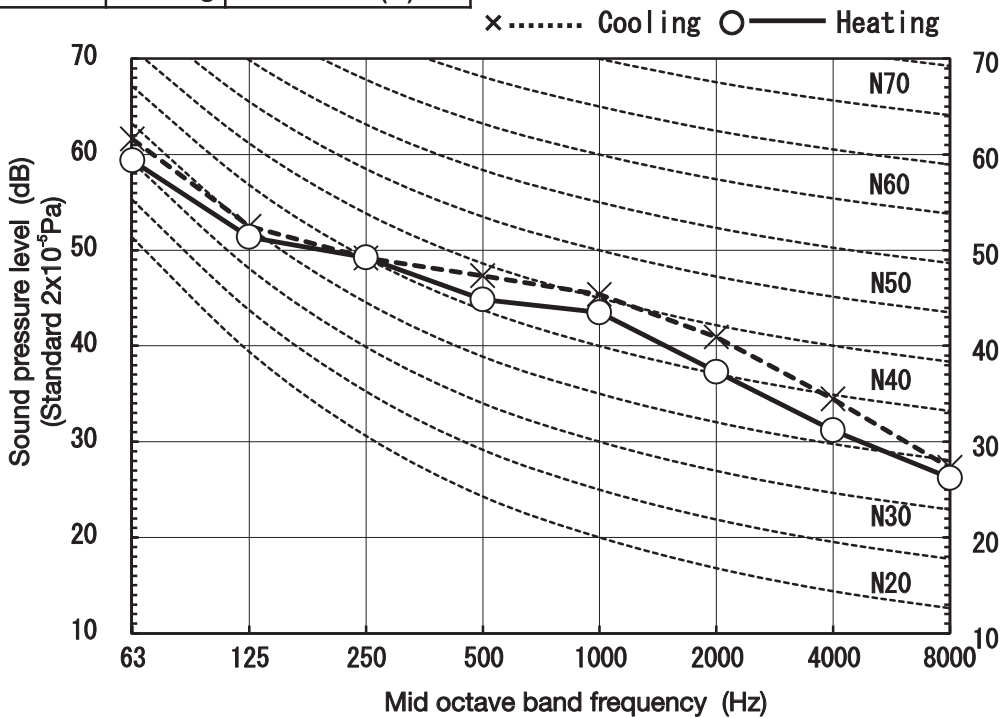


Model SRK50ZS-W, -WB, -WT

Condition	ISO5151 T1/H1
MODE	Rated capacity value

(Indoor unit)

Model	SRK50ZS-W, WB, WT	
Noise Level	Cooling	46 dB(A)
	Heating	46 dB(A)


● Mike position

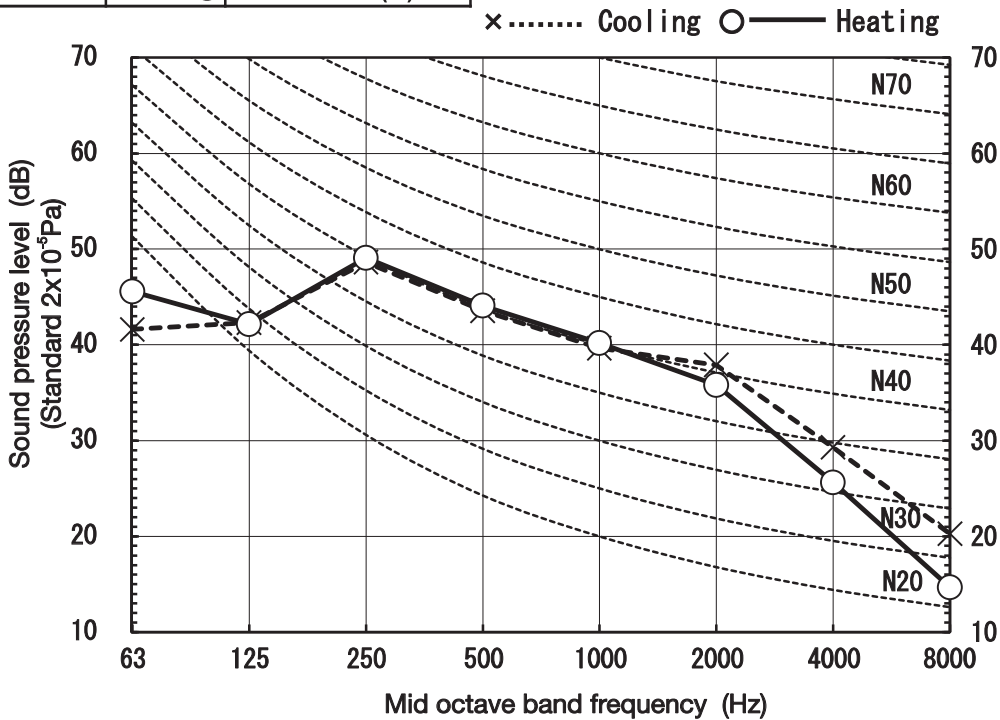

(Outdoor unit)

Model	SRC50ZS-W	
Noise Level	Cooling	51 dB(A)
	Heating	52 dB(A)

● Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

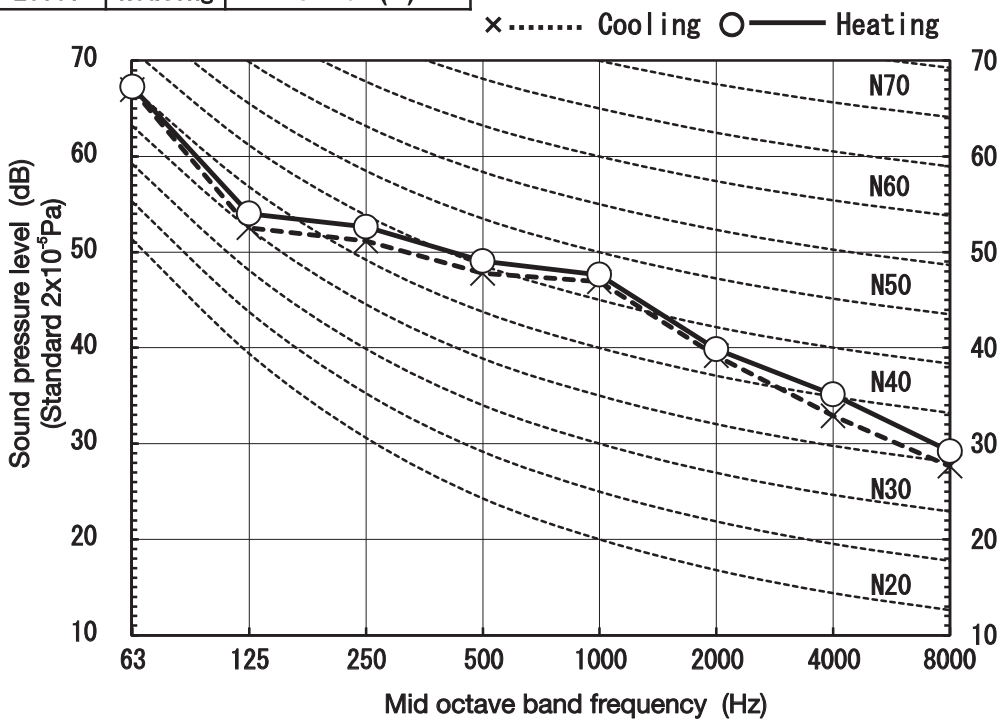


(b) Each fan speed mode

Condition	ISO5151 T1/H1
MODE	Hi

(Indoor unit)

Model	SRK20ZS-W,WB,WT	
Noise Level	Cooling	34 dB(A)
	Heating	36 dB(A)

●Mike position

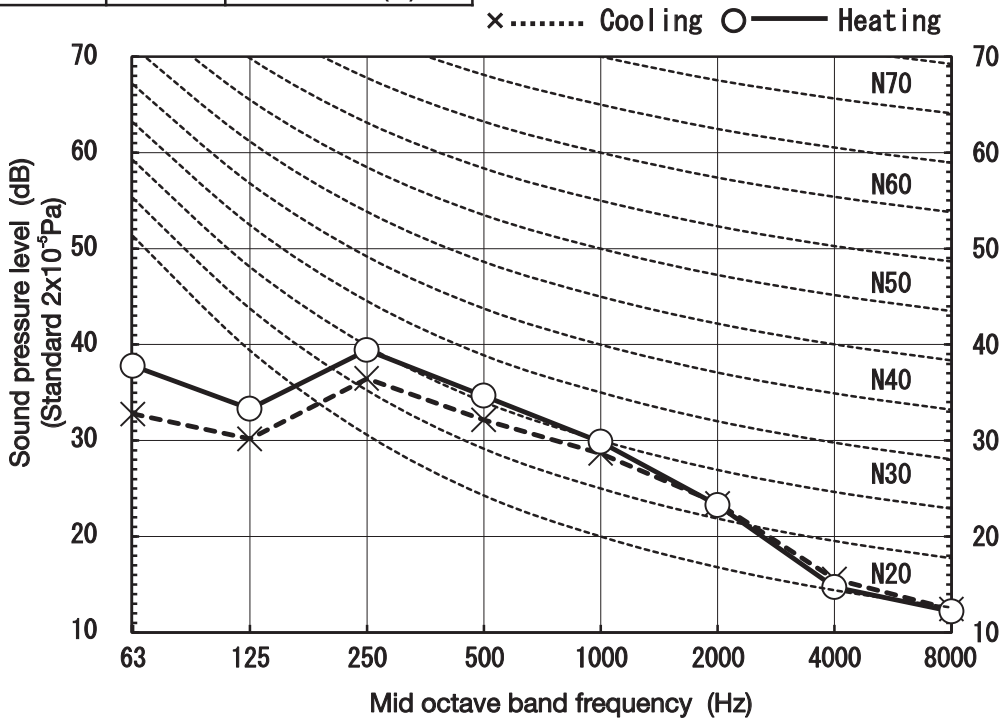


MODE	Me
------	----

(Indoor unit)

Model	SRK20ZS-W,WB,WT	
Noise Level	Cooling	25 dB(A)
	Heating	29 dB(A)

●Mike position

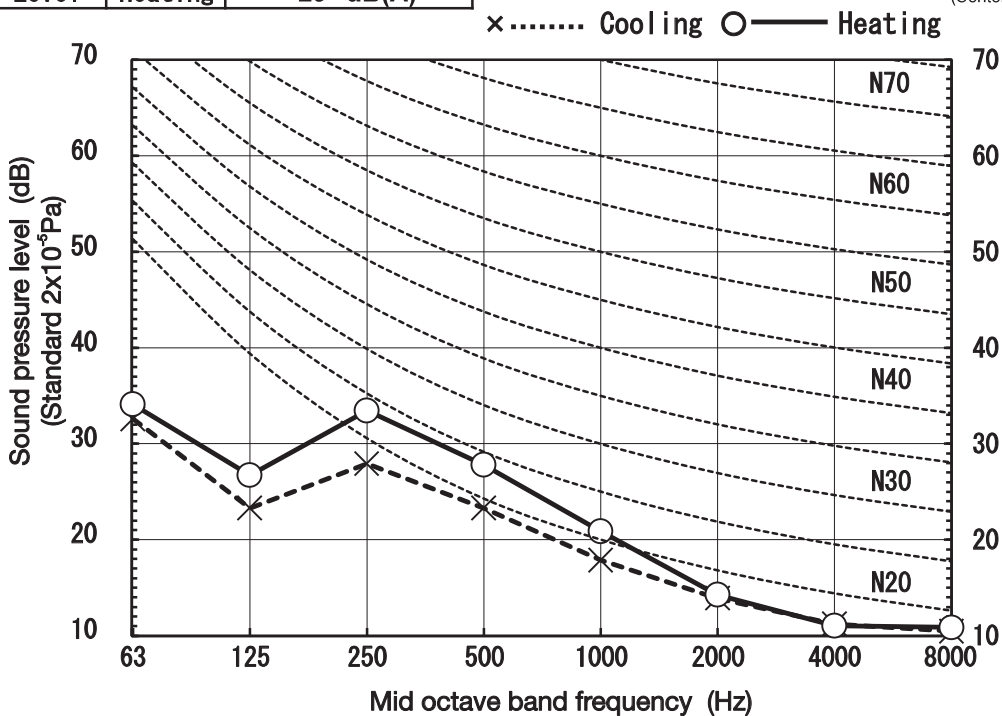


Condition	IS05151 T1/H1
MODE	Lo

(Indoor unit)

Model	SRK20ZS-W, WB, WT	
Noise Level	Cooling	22 dB(A)
	Heating	23 dB(A)

●Mike position

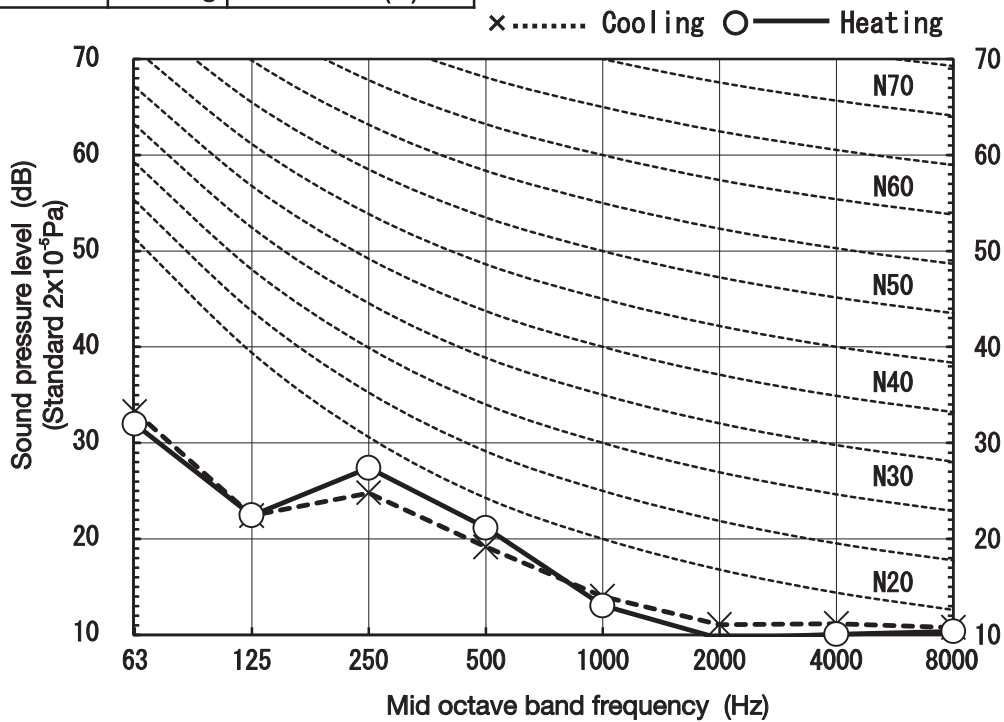


MODE	ULo
------	-----

(Indoor unit)

Model	SRK20ZS-W, WB, WT	
Noise Level	Cooling	19 dB(A)
	Heating	19 dB(A)

●Mike position

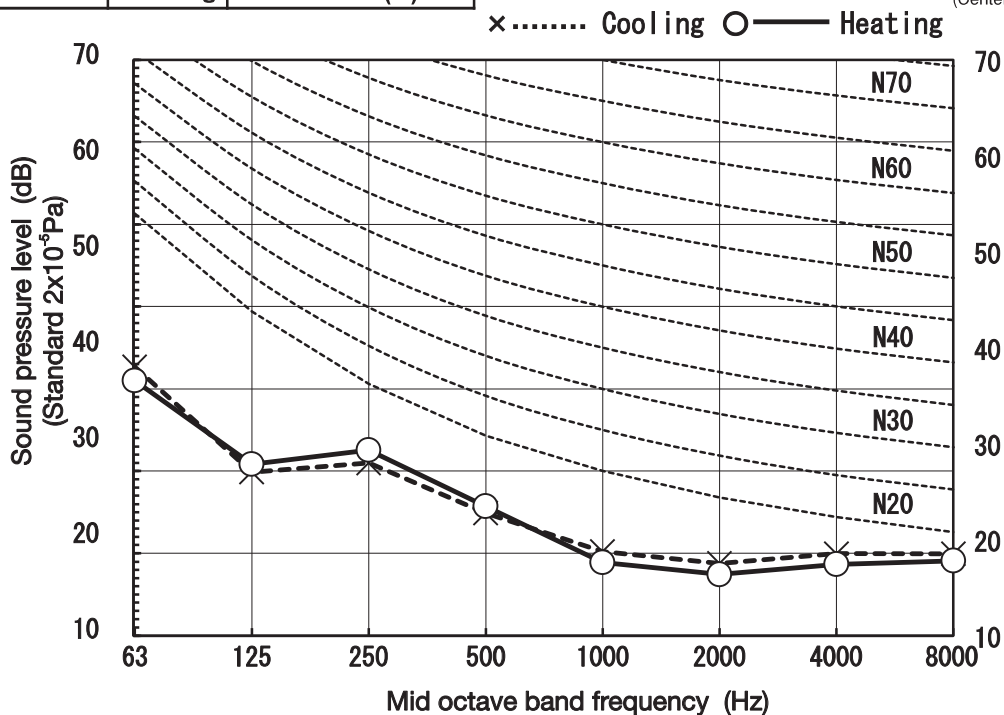


Condition	IS05151 T1/H1
MODE	Hi

(Indoor unit)

Model	SRK25ZS-W, WB, WT	
Noise Level	Cooling	36 dB(A)
	Heating	39 dB(A)

● Mike position

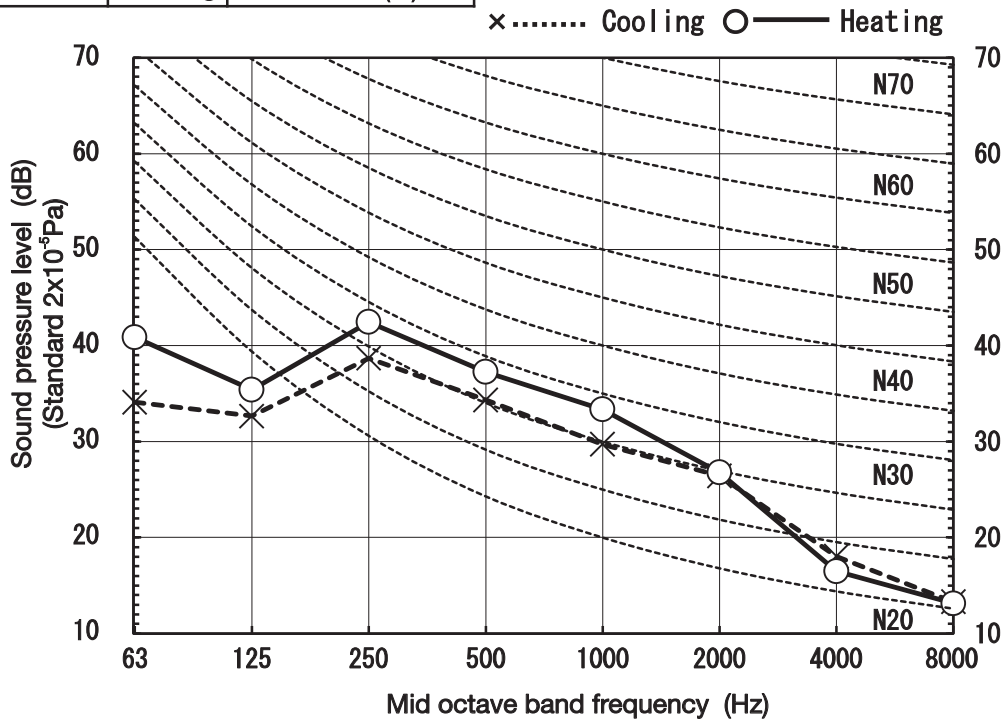


MODE	Me
------	----

(Indoor unit)

Model	SRK25ZS-W, WB, WT	
Noise Level	Cooling	28 dB(A)
	Heating	30 dB(A)

● Mike position

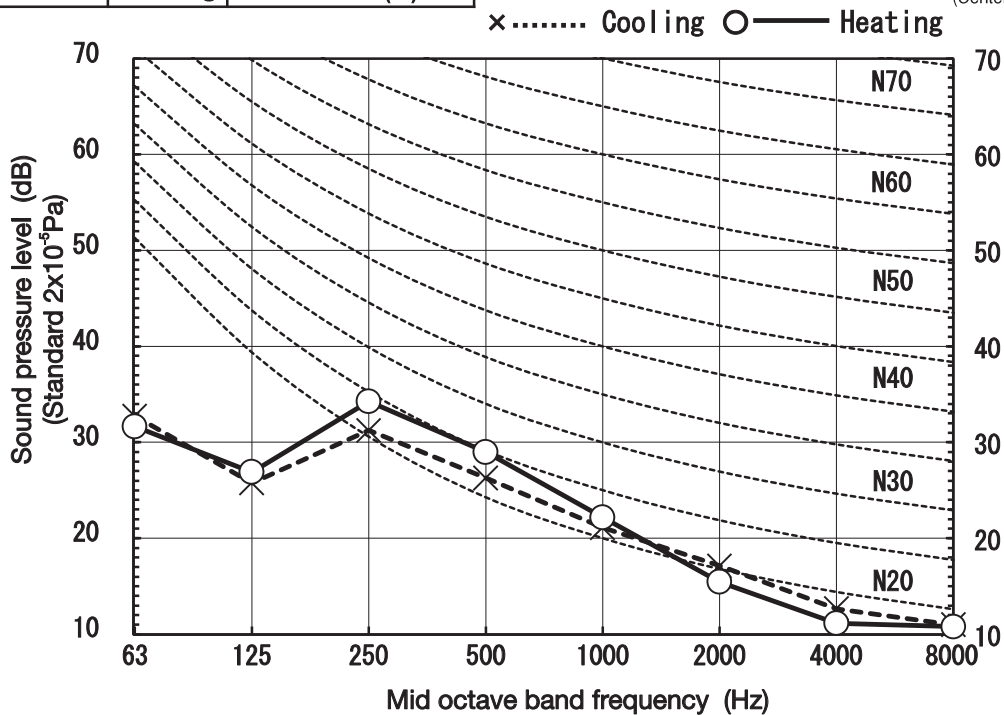


Condition	IS05151 T1/H1
MODE	Lo

(Indoor unit)

Model	SRK25ZS-W, WB, WT	
Noise Level	Cooling	23 dB(A)
	Heating	24 dB(A)

● Mike position

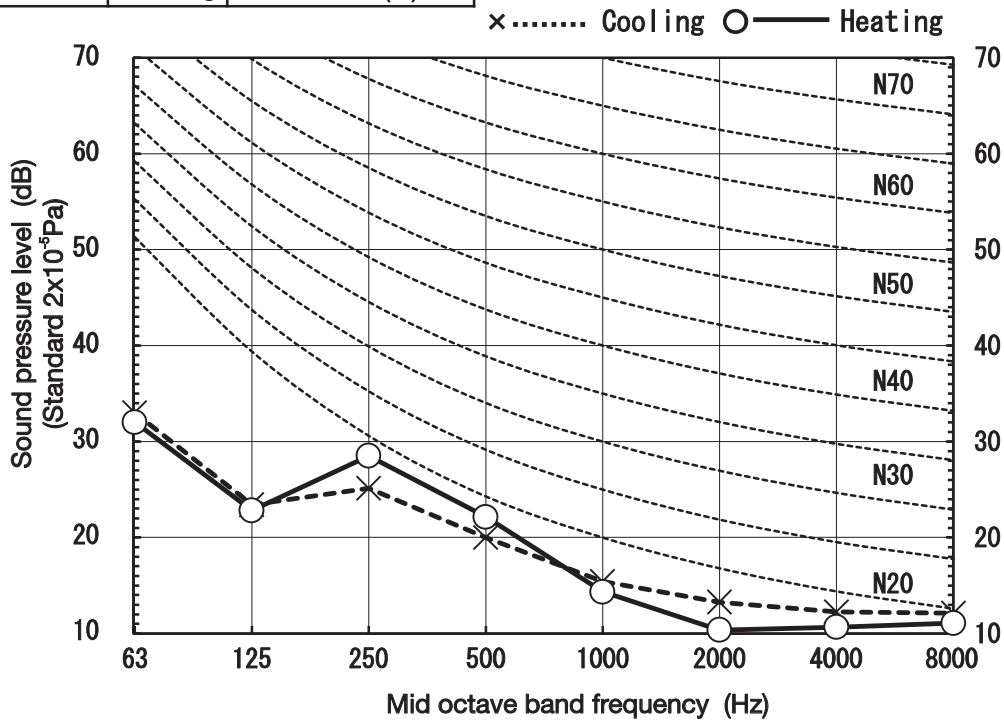


MODE	ULo
------	-----

(Indoor unit)

Model	SRK25ZS-W, WB, WT	
Noise Level	Cooling	19 dB(A)
	Heating	19 dB(A)

● Mike position

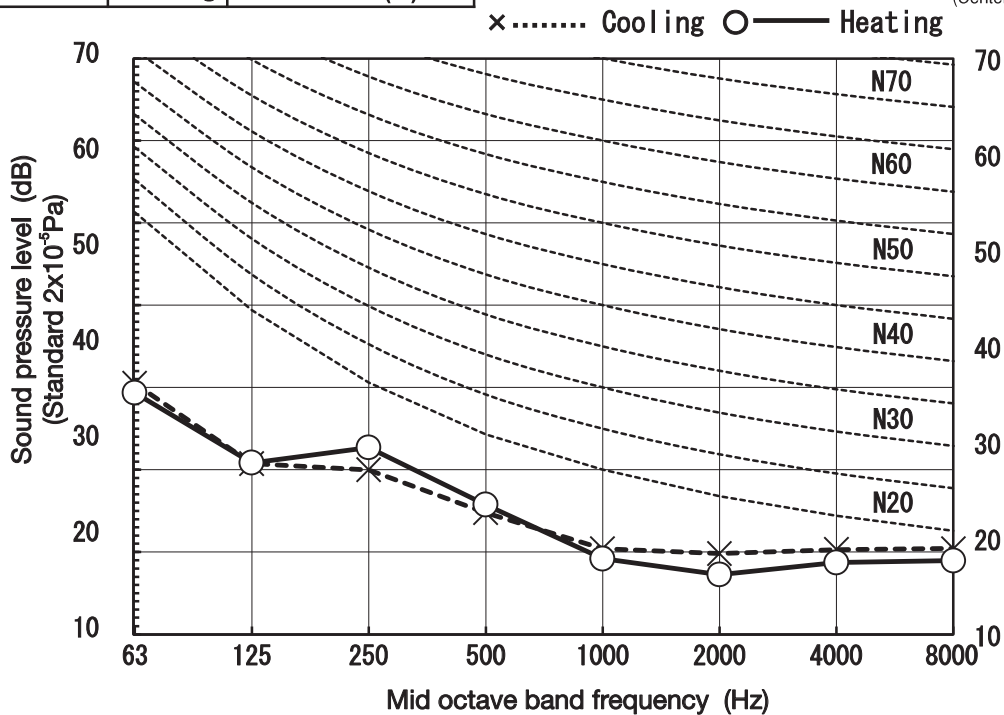


Condition	IS05151 T1/H1
MODE	Hi

(Indoor unit)

Model	SRK35ZS-W, WB, WT	
Noise Level	Cooling	40 dB(A)
	Heating	41 dB(A)

● Mike position

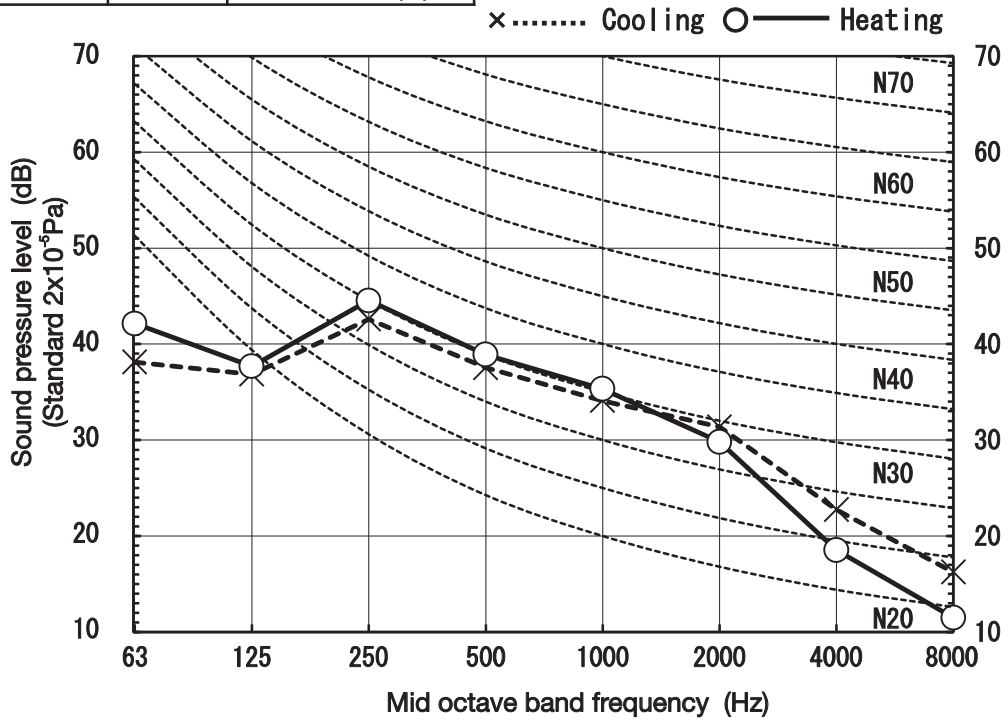


MODE	Me
------	----

(Indoor unit)

Model	SRK35ZS-W, WB, WT	
Noise Level	Cooling	30 dB(A)
	Heating	36 dB(A)

● Mike position

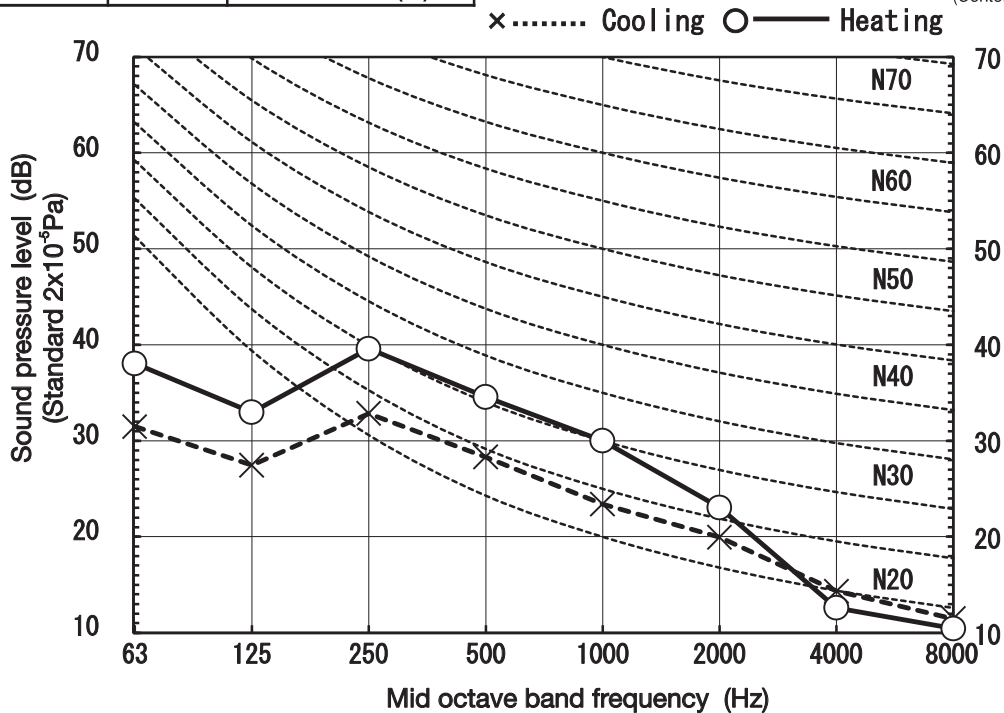


Condition	ISO5151 T1/H1
MODE	Lo

(Indoor unit)

Model	SRK35ZS-W, WB, WT	
Noise Level	Cooling	26 dB(A)
	Heating	25 dB(A)

● Mike position

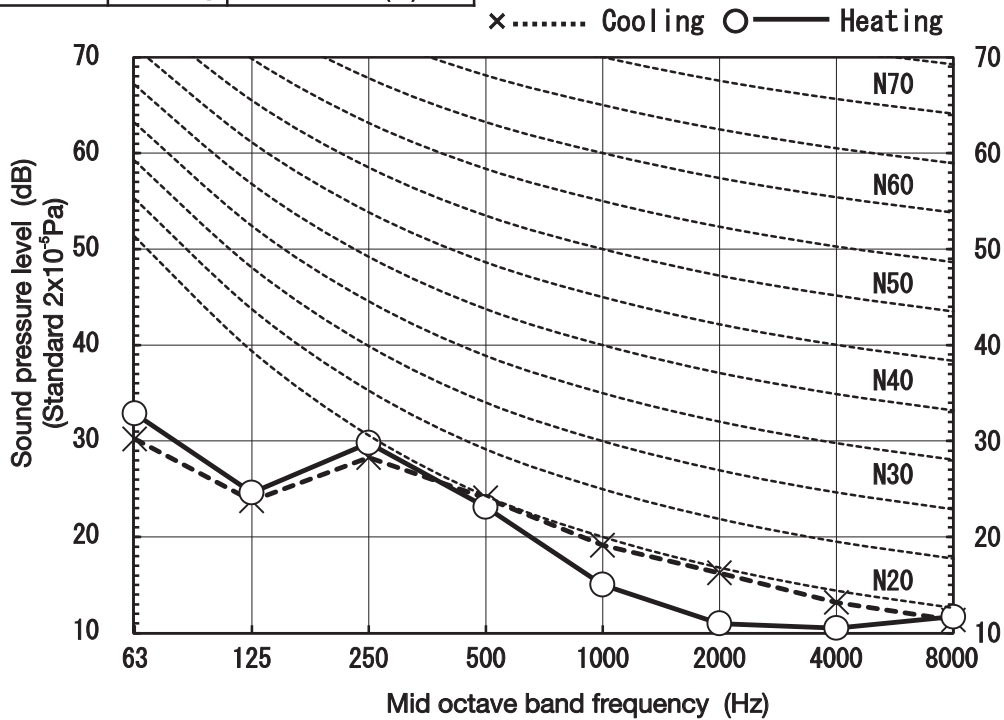


MODE	ULo
------	-----

(Indoor unit)

Model	SRK35ZS-W, WB, WT	
Noise Level	Cooling	19 dB(A)
	Heating	19 dB(A)

● Mike position

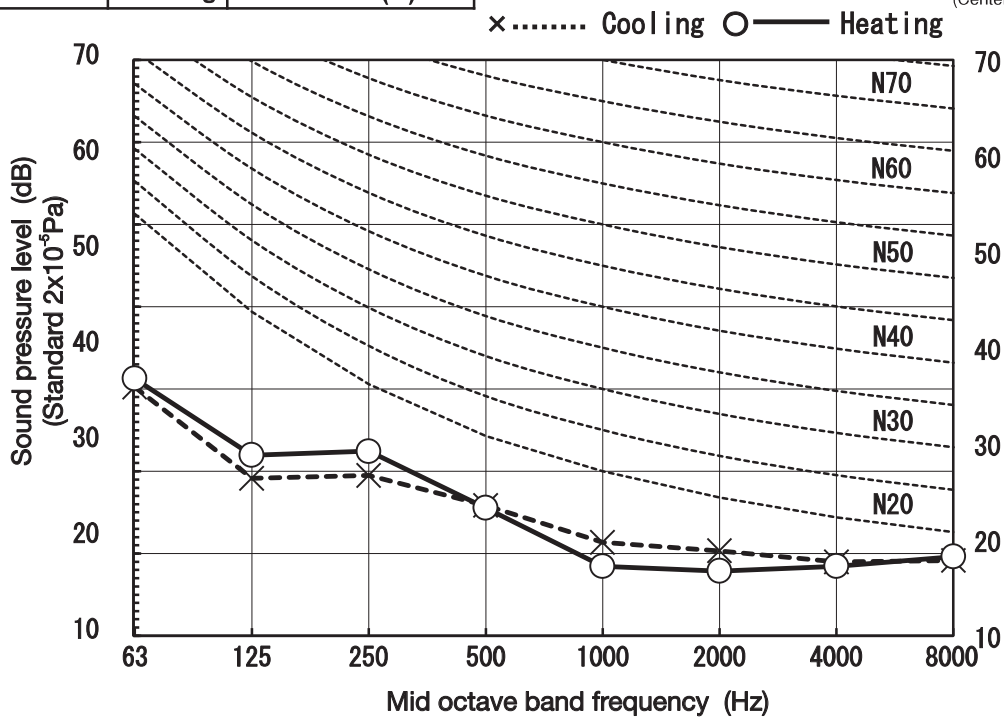


Condition	ISO5151 T1/H1
MODE	Hi

(Indoor unit)

Model	SRK50ZS-W,WB,WT	
Noise Level	Cooling	46 dB(A)
	Heating	46 dB(A)

●Mike position

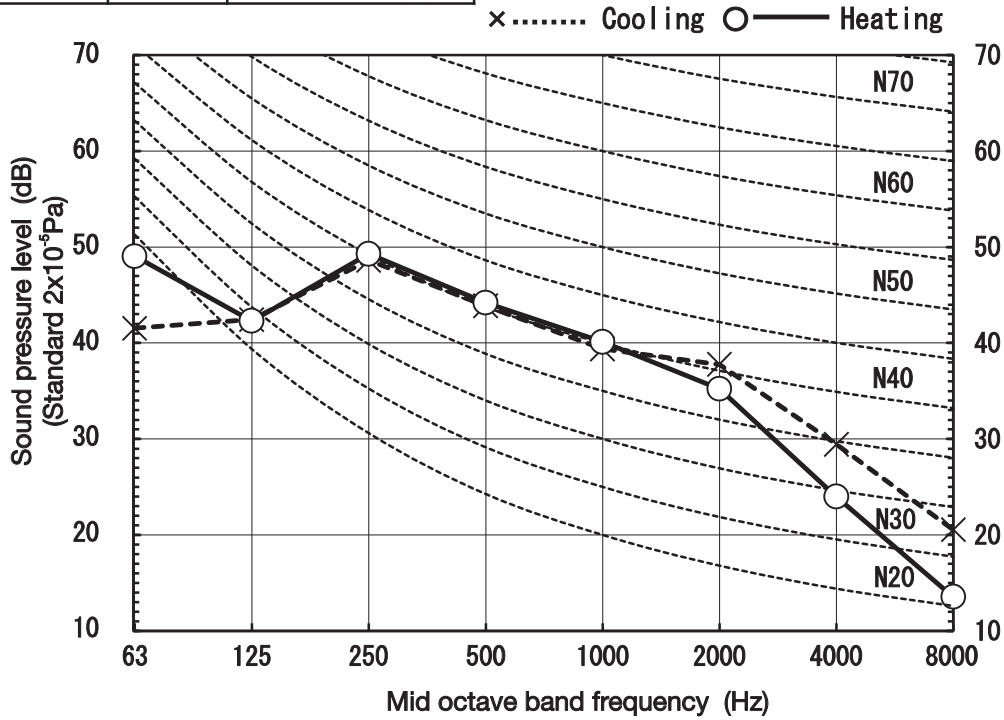


MODE	Me
------	----

(Indoor unit)

Model	SRK50ZS-W,WB,WT	
Noise Level	Cooling	36 dB(A)
	Heating	37 dB(A)

●Mike position

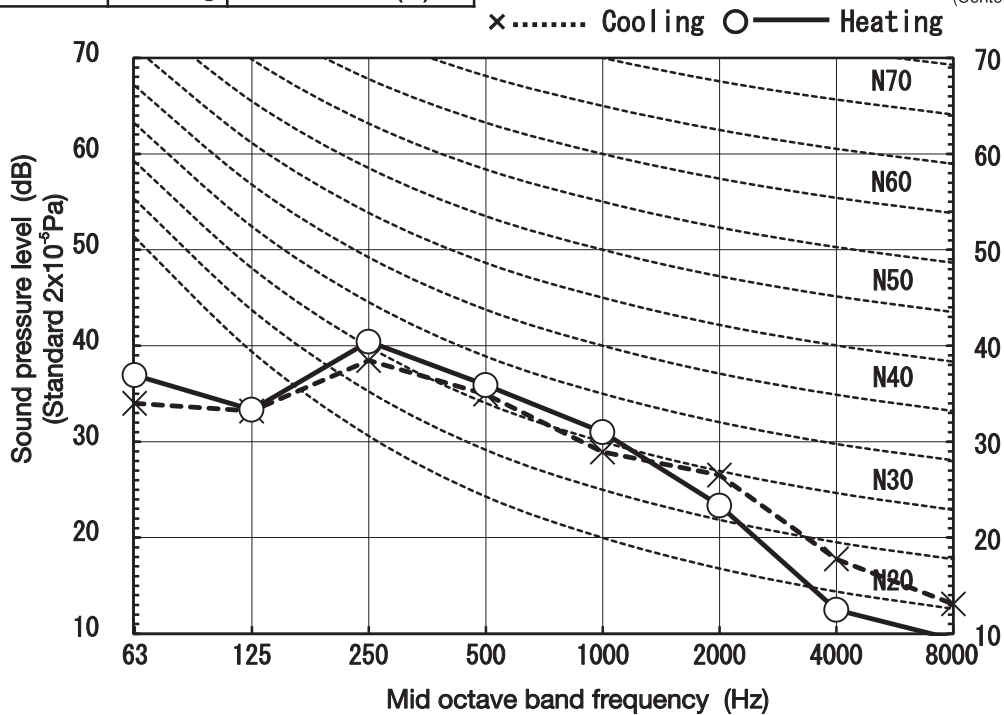

Condition	IS05151 T1/H1
MODE	Lo


(Indoor unit)

Model	SRK50ZS-W,WB,WT	
Noise Level	Cooling	29 dB(A)
	Heating	31 dB(A)

●Mike position



x..... Cooling ○ — Heating

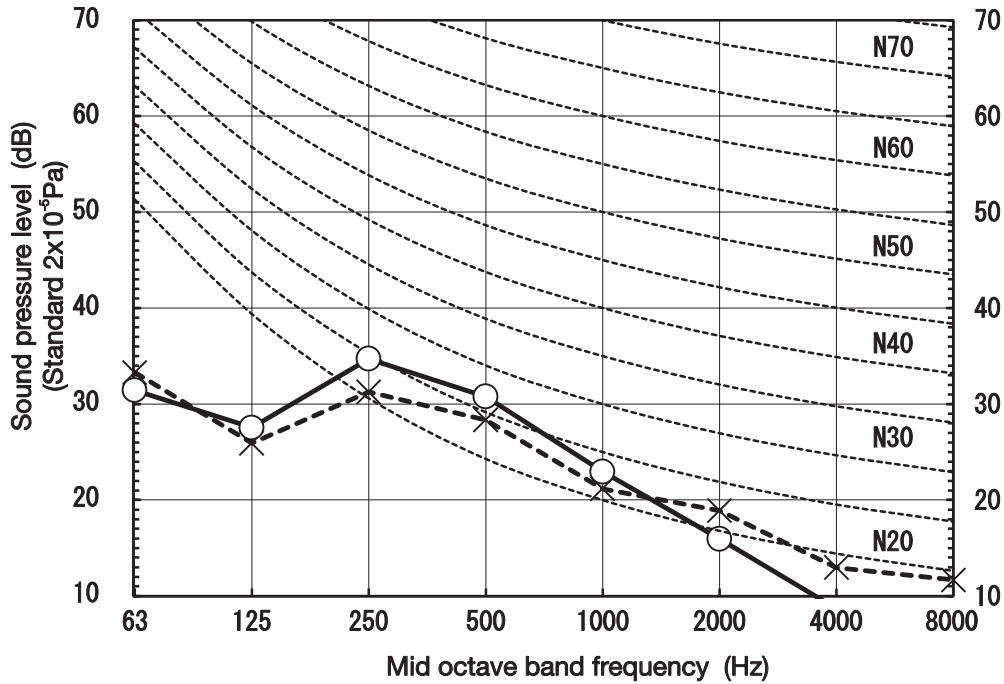


MODE	ULo
------	-----

●Mike position



x..... Cooling ○ — Heating

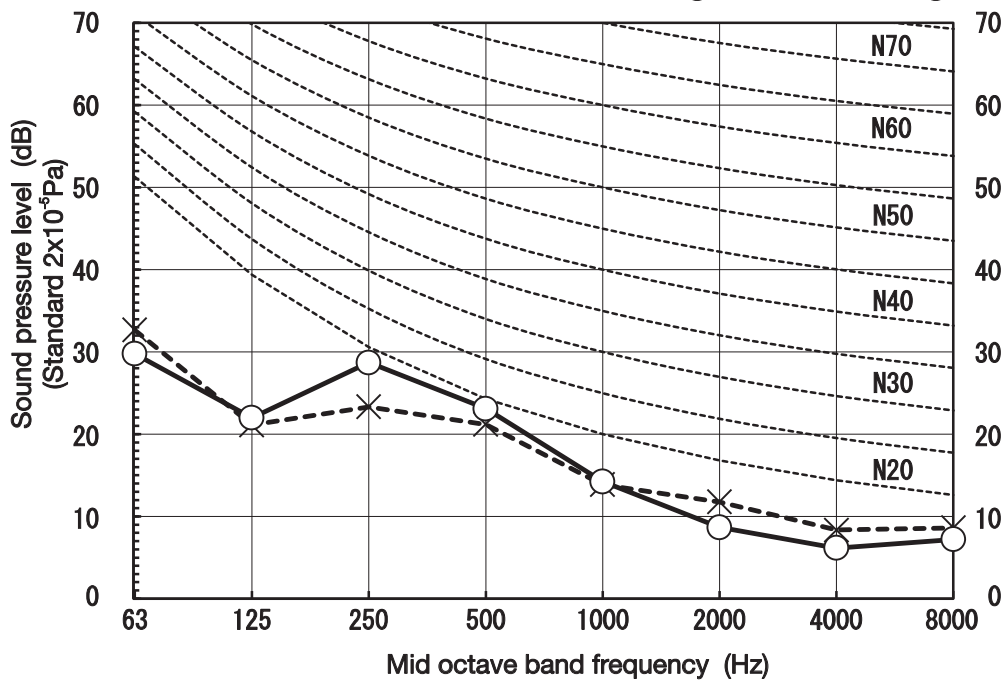


(Outdoor unit)

Model	SRC20ZS-W	
Noise Level	Cooling	42 dB(A)
	Heating	43 dB(A)

Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Silent
------	--------

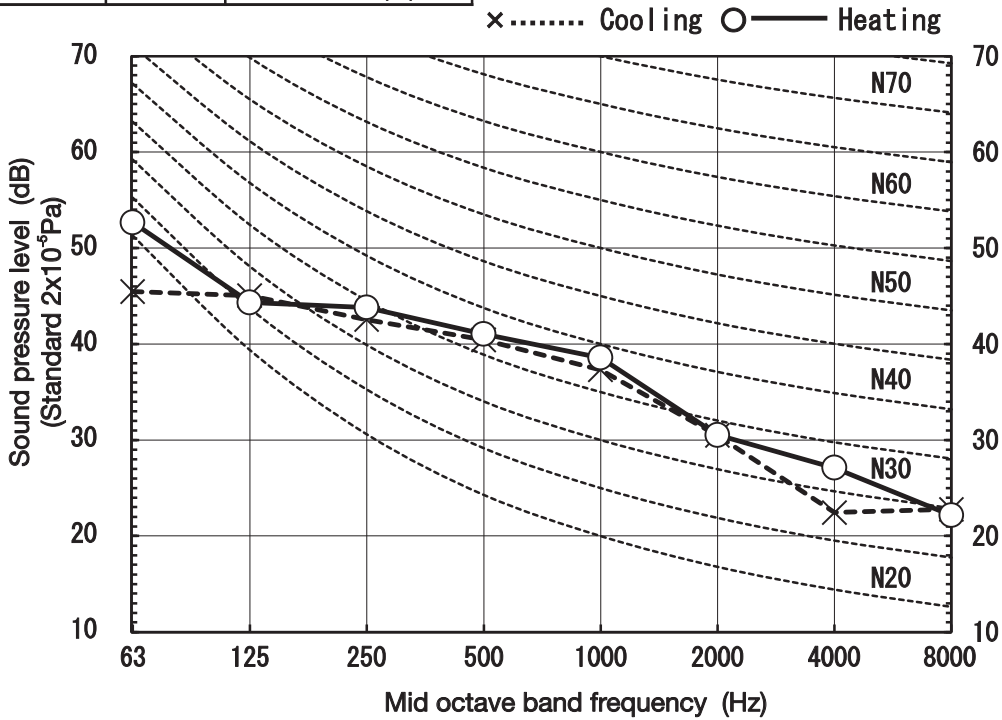


(Outdoor unit)

Model	SRC25ZS-W	
Noise Level	Cooling	42 dB(A)
	Heating	43 dB(A)

Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

MODE	Silent
------	--------

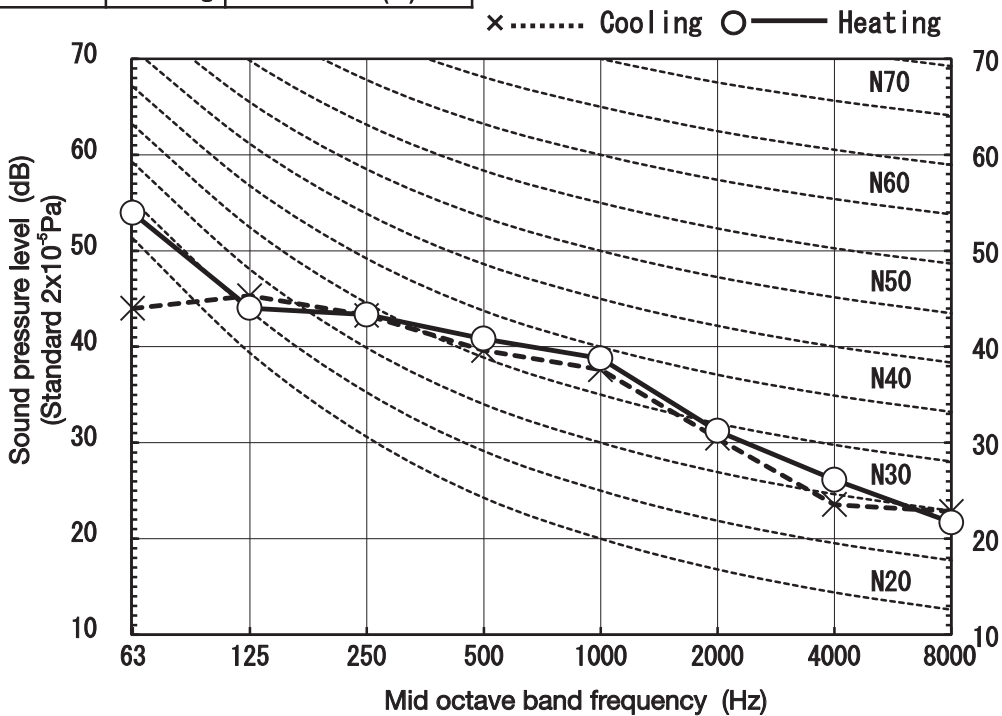


(Outdoor unit)

Model	SRC35ZS-W	
Noise Level	Cooling	45 dB(A)
	Heating	44 dB(A)

Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

Condition	ISO5151 T1/H1
-----------	---------------

MODE	Silent
------	--------

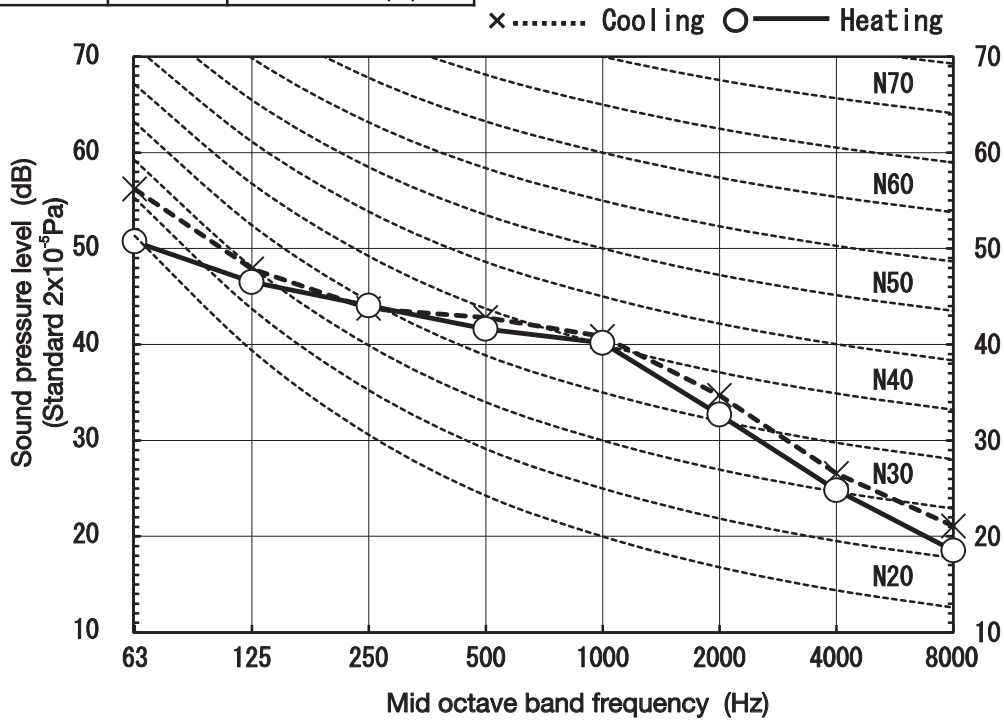

(Outdoor unit)

Model	SRC50ZS-W	
Noise Level	Cooling	43 dB(A)
	Heating	45 dB(A)

Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

MODE	Silent
------	--------

